

IXARC Absolute Rotary Encoder

OCD-DPC1B-1213-C10S-H3P



Interface

Interface	Profibus DP
Profile	DPV0, DPV1 and DPV2 Class 2 (EN50170 + EN50254)
Diagnostics	Memory
Manual Functions	Address selector switch 0-99 and terminal resistor (with connection cap)
Features	Round Axis
Transmission Rate	≤ 12 Mbaud
Interface Cycle Time	≥ 1 ms
Programming Functions	Resolution, gearing factor (physical resolution) , velocity scaling + filter, preset (zero point), counting direction, limit switches , node number, teach-in, diagnosis

Outputs

Output Driver	Profibus Data Interface, galvanically isolated via opto-couplers
---------------	--

Electrical Data

Supply Voltage	10 - 30 VDC
Power Consumption	≤ 1.5 W
Start-Up Time	< 1 s
Reverse Polarity Protection	Yes

Data Sheet

Printed at 11-12-2023 18:12

Short Circuit Protection	Yes
EMC: Emitted Interference	DIN EN 61000-6-4
EMC: Noise Immunity	DIN EN 61000-6-2
MTTF	13.5 years @ 40 °C

Sensor

Technology	Optical
Resolution Singleturn	13 bit
Resolution Multiturn	12 bit
Multiturn Technology	Mechanical Gearing (no Battery)
Accuracy (INL)	$\pm 0.0220^\circ$ (14 - 16 bit), $\pm 0.0439^\circ$ (≤ 13 bit)
Code	Binary

Environmental Specifications

Protection Class (Shaft)	IP66/IP67
Protection Class (Housing)	IP66/IP67
Operating Temperature	-40 °C (-40 °F) - +85 °C (+185 °F)
Storage Temperature	-40 °C (-40 °F) - +85 °C (+185 °F)
Humidity	98% RH, no condensation

Mechanical Data

Connection Cap Material	Aluminum
Housing Material	Steel
Housing Coating	Wet coating (RAL 9006 White Aluminium) + Cathodic corrosion protection (>720 h salt spray resistance)
Flange Type	Clamp, $\varnothing$ 58 mm (C)
Flange Material	Aluminum
Shaft Type	Solid, Single Flat, Length = 20 mm
Shaft Diameter	$\varnothing$ 10 mm (0.39")
Shaft Material	Stainless Steel V2A (1.4305, 303)
Max. Shaft Load	Axial 40 N, Radial 110 N
Minimum Mechanical Lifetime (10^8 revolutions with Fa/Fr)	430 (20 N / 40 N), 150 (40 N / 60 N), 100 (40 N / 80 N), 55 (40 N / 110 N)
Rotor Inertia	$\leq 30 \text{ gcm}^2$ [$\leq 0.17 \text{ oz-in}^2$]
Friction Torque	$\leq 5 \text{ Ncm}$ @ 20 °C, (7.1 oz-in @ 68 °F)
Max. Permissible Mechanical Speed	$\leq 3000 \text{ 1/min}$
Shock Resistance	$\leq 100 \text{ g}$ (half sine 6 ms, EN 60068-2-27)

Data Sheet

Printed at 11-12-2023 18:12

Permanent Shock Resistance	≤ 10 g (half sine 16 ms, EN 60068-2-29)
Vibration Resistance	≤ 20 g (20 Hz - 2000 Hz, EN 60068-2-6)
Length	80,5 mm (3.17")
Weight	480 g (1.06 lb)

Electrical Connection


Connection Orientation	Radial
Connection Type	3 x Cable Gland
Connection Cap Type	Removable for easy replacing encoder without new installation of cable, Rotary switches with visible node number, No active components, Terminal resistor switch cut the outgoing bus too, Big spring clips

Certification

Approval	CE
----------	----

Product Life Cycle

Product Life Cycle	Established
--------------------	-------------

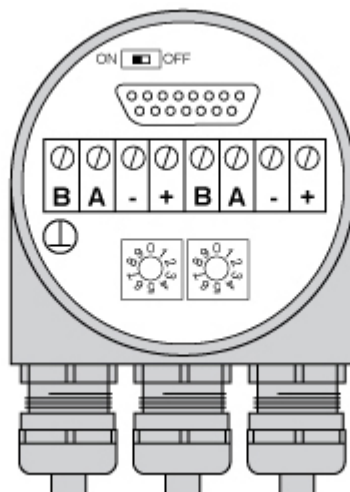

Connection Plan

SIGNAL	PIN NUMBER
Bus line B (Bus in)	B
Bus line A (Bus in)	A
GND	-
Power Supply	+

Data Sheet

Printed at 11-12-2023 18:12

Bus line B (Bus out)	B
Bus line A (Bus out)	A
GND	—
Power Supply	+

Connector-View on Encoder

Dimensional Drawing

Accessories

Couplings

Coupling Disc Type-10-12
 Coupling Bellow Type-10-10
 Coupling Bellow Type-06-10
 Coupling Bellow Type-08-10
 Coupling Bellow Type-10-12
 Coupling Bellow Type-10-(1/4")
 Coupling Bellow Type-10-(3/8")
 Coupling Jaw Type-06-10
 Coupling Jaw Type-08-10
 Coupling Jaw Type-10-12
 Coupling Jaw Type-10-(1/4")
 Coupling Jaw Type-10-(3/8")
 Coupling Jaw Type-10-10
 Coupling Disc Type-06-10
 Coupling Disc Type-10-10

More

Adapter Flanges

Mounting Bracket for Clamping Flange w/ fixtures
 L Mounting Bracket w/ screws
 Mounting Bracket Spring Loaded f. Clamping Flange
 Spring Loaded Pivot Arm 58mm

More

Clamping Rings

Clamp Disc w/ Eccentric Hole-4pcs
 Clamp Disc w/ Centred Hole-4pcs

Got questions? Need an individual solution? We are here to help!



Contact Us

If the drawings are not available please refer to the "Download" section. The picture and drawing are for general presentation purposes only.
All dimension in [inch] mm. © FRABA B.V., All rights reserved. We do not assume responsibility for technical inaccuracies or omissions.
Specifications are subject to change without notice.